

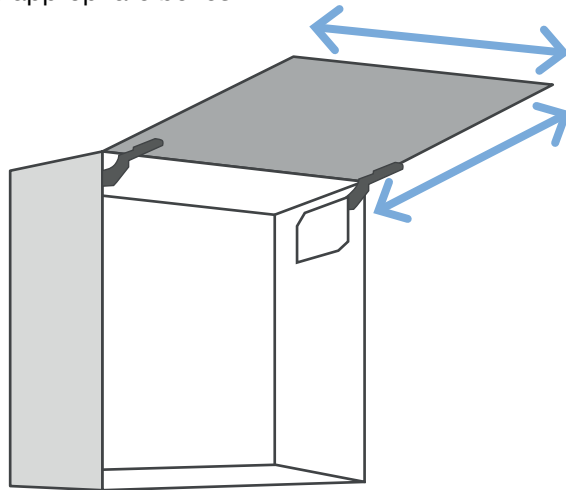
Measurement instructions: flap opening upwards

Step 1 – External dimensions:

Measure the width and height of the flap **from outer edge to outer edge** on the inside/back side of the flap and enter the measurements (mm) in the appropriate boxes.

Required tools:

Tape measure, pen, and the printed measurement instructions.


 mm

Height of the front

 mm

Width of the front

Step 2 – Drilling and fittings (optional):

Upon request, we can provide suitable fittings (including drill holes). You can select them in the configurator. Next, measure how many millimetres your existing front overlaps the edges of your cabinet's carcass.

top _____ mm

left _____ mm

right _____ mm

Step 3 – Handle drillings (optional):

For flaps, the handles are always positioned centrally and aligned horizontally.

If you already have a handle that you want to install on your new flap, please provide us with the distance between the handle screws (in mm). This distance is always measured from the centre of one screw hole to the centre of the other screw hole.

Distance between handle screws: _____ mm

Step 4 – Configuration:

After measuring, you can quickly and easily enter the data into the configurator at <https://www.Furnfab.com/en/renovating-fronts>.

Need help?

If you have any questions, our team is happy to assist you!

You can reach us easily and quickly via email, through our website, or by phone:

Email: service@furnfab.com

Contact form: <https://www.furnfab.com/en/contact>

Phone: +44 (0) 131 608 34 77